

GET SMALLER BE STRONGER

VANDAL PROOF MINI-DOME CAMERA
L6204-D/6104-D



L6204-D/6104-D
(Surface Type / Black)



3.6mm LENS FOR INDOOR MONITORING

L6204-D/6104-D has 3.6mm lens (2.5/6.0mm lens variation), which is proper to monitor various indoor spaces such as elevator or building entrance.



Elevator Scene



Building Scene



WDR (WIDE DYNAMIC RANGE)

WDR allows dark portions of a bright image to be shown clearly, thus enhancing details and removing noise.



Conventional



Wide Dynamic Range



MINI-SIZE DOME

L6204-D/6104-D can be easily harmonized with all indoor/outdoor spaces thanks to its compact mini-size, which also relieves customers' repulsion toward surveillance.



L6204F-D/6104F-D
(In-Ceiling Type / Silver)



L6204F-D/6104F-D
(In-Ceiling Type / Black)



VANDAL PROOF / IP66

This camera's durable cover protects it from external impacts such as extreme changes in temperature and humidity, and vandalism.



Vandal Proof



IP66



EASY INSTALLATION

Users can operate the manual conveniently using the included remote control. 3-axis mechanism lets users install the camera at any angle.



COMPACT DOME WITH SOLID DESIGN

MINI-DOME CAMERA L6204-D/6104-D



L6204-D/6104-D
(Surface Type / Silver)


SPECIFICATIONS

Model	L6204-DN	L6204-DP	L6104-DN	L6104-DP
Signal System	NTSC	PAL	NTSC	PAL
Total Pixels No.	410K	470K	410K	470K
Imaging Device	6.0mm (1/3 Type) Double Interline CCD		6.0mm (1/3 Type) Interline Color CCD	
Lens	3.6mm Fixed Lens (Option = 2.5/6.0mm)			
Digital Zoom	x8		-	
Sync. System	Internal			
Scanning Frequency (H/V)	15.734 KHz / 59.94 Hz	15.625 KHz / 50 Hz	15.734 KHz / 59.94 Hz	15.625 KHz / 50 Hz
Horizontal Resolution	600TV Lines		540TV Lines	
S/N Ratio	60dB		48dB	
Minimum Illumination (30 IRE)	0.2 Lux @ Sens-up Off		0.1 Lux @ Sens-up Off	
Control Method	Remote Control			
Video Output Signal	1Vp-p Composite (75Ω)			
Day & Night (Digital)	On / Off			
Backlight Compensation	BLC / WDR / HSBC		Digital WDR / BLC / Wide BLC / HSBC / LSC	
DNR	3D DNR (Off / Low / Middle / High)		2D DNR (Off / Low / Middle / High)	
Auto Gain Control	Off / Low / Middle / High			
Electronic Shutter Speed	1/60 ~ 1/90,000	1/50 ~ 1/90,000	1/60 ~ 1/100,000	1/50 ~ 1/100,000
White Balance	ATW / AWC / Manual (1,700 °k ~ 11,000 °k)		ATW / AWB / Manual (2,500 °k ~ 10,500 °k)	
Digital Effect	Off / V-Flip / Mirror / Rotate		Off / Mirror	
Sharpness	Adjustable			
Privacy Zone Masking	8 Mask Zones		4 Mask Zones	
Stabilizer (DIS)	On / Off			
Multi OSD Language	15 Languages		2 Languages	
Power Source	DC 12V ± 10%		DC 12V ± 20%	
Power Consumption	Max 2.2 W		Max 1.5 W	
Operation Temperature / Humidity	-10°C ~ 50°C / 0% ~ 80%RH (Non-Condensing)			
Storage Temperature / Humidity	-20°C ~ 60°C / 0% ~ 85%RH (Non-Condensing)			
Environment	Vandal Proof / IP66			
Weight	0.385 Kg			
Dimension (Ø x H)	Ø 92 x 65 mm (In-Ceiling Type : Ø 95 x 65 mm)			
Accessory	Install Guide Sticker / Screw / Installation Manual / Remote Control			


* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

DIMENSION

| SURFACE TYPE |

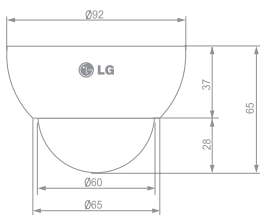


| IN-CEILING TYPE |

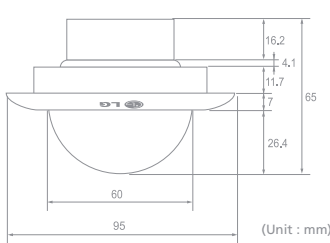

(Unit : mm)

REAR VIEW

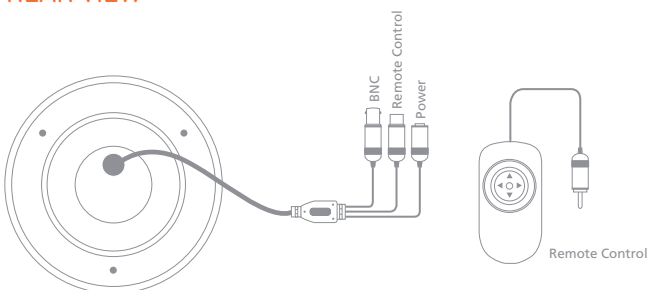

FEATURES

- 6.0mm (1/3 Type) Double Interline CCD (L6204-D)
- 600TV Lines (L6204-D)
- 3-Axis Mechanism
- 3.6mm Fixed Lens (Option = 2.5/6.0mm)
- Digital Day & Night
- Wide Dynamic Range
- Vandal Proof / IP66
- Privacy Zone Masking
- DC 12V



The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)



Business Solutions Company

Security Business Team
LG Twin Towers, 20 Yeouido-dong,
Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184
Fax : +82-3777-5185
<http://www.lg.com/global/security>
E-mail : lgsecurity@lg.com

